

MAMBA



Mamba is a multi-functional bar light integrating beam, wash and strobe. It consists of 12*40W LED chips, with uniform RGBL color mixing system for rich and colorful colors. Each LED can be individually controlled to achieve the effect of Marquee.

Unique optical design, zoom range of 3.6°~56°; Small Angle light beam sense is strong, full without cross, large Angle color mixing effect is excellent. Built-in multiple color macro and effect macro;

The product has simple appearance, compact structure, aluminum alloy and engineering plastic shell, small size, light weight, very suitable for entertainment, rental, television, music festival, exhibition, variety programs and

other applications.

FEATURES

- 12*40W LED chip RGBL 4 in 1
- zoom range of 3.6°~56°
- Color Temperature: 2200K-8000K
- Light Luminous Flux: 26558lux@5 meters
- uniform RGBL color mixing and rainbow effect
- support individual controlled, varied in color and effect

OPTICAL

Light source : 12*40W LED chip RGLB 4 in 1
Beam angle : 3.6°-38°
Zoom angle : 4.2°-56°
Color Temperature : 2200K-8000K
Light Luminous Flux : 26558lux@5 meters

EFFECTS

Color Mixing System : uniform RGLB color mixing and rainbow effect
Zoom system : Linear electronic zoom
Individual Controlled : support individual controlled, varied in color and effect
Effect macro : static and dynamic
Dimmer : Linear electronic dimmer, provides four dimming options
Strobe : 1-30Hz electronic strobe and random strobe

CONTROL

Controlled Channel : 15CH(Standard),60CH(Extended),see channel table for details
Control Mode : DMX512, RDM, ART-NET
Data connection : RJ45 input and output, 3-pin and 5-pin input and output
Display : LCD Lattice screen

SOFTWARE

Upgrade : through USB can upgrade software system by each and by group (in the same DMX cable)
Intelligent temperature control to ensure long lifespan of LED

PAN/TILT MOVEMENT


Tilt movement : 185° 16 bit precision

POWER

Voltage : AC 100-240V 50/60Hz
Power : 465W PF : >0.98

SIZE & WEIGHT

Light Size : 1003×126×308(mm)
N.W : 24.7 kg
Carton size : 1145×210×395(mm)
G.W : 27.2 kg

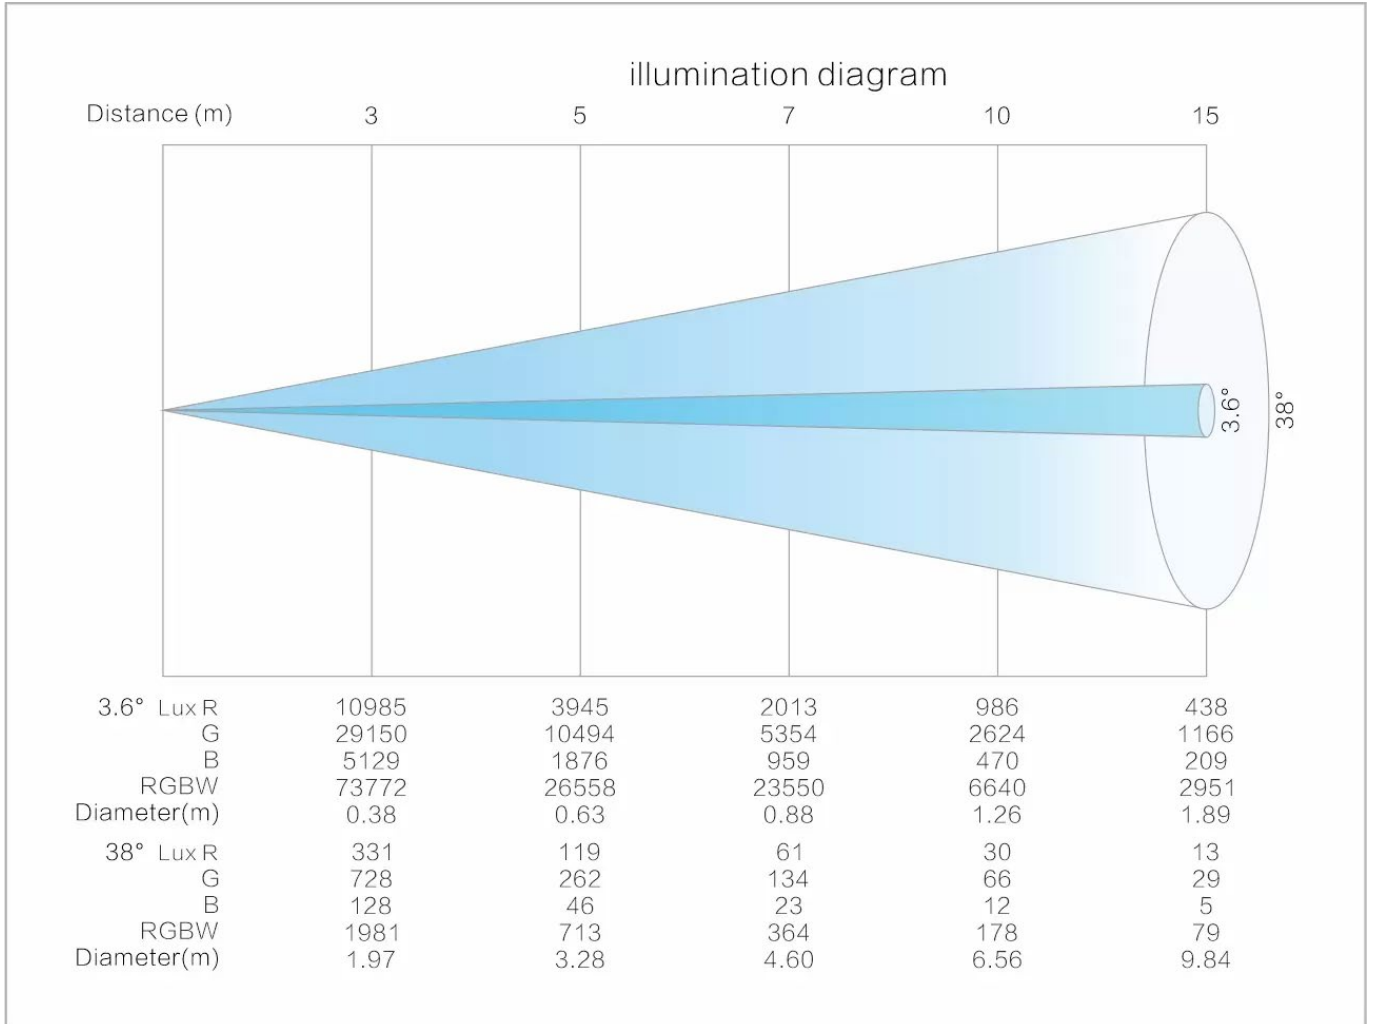

OTHERS

- IP rate : IP20
- Working environment : -10°C ~ 45°C
- Maximum temperature of fixture body surface : 80°C
- Maximum on-line quantity : 2pcs/110V 4pcs/220V
- Maximum current : 2.12A/220V; 4.23A/110V